


HG4000Tx HORIZONTAL GRINDER



JOBSITE SAFETY. The thrown object deflector (TOD) reduces the amount and distance of thrown material debris, while also reducing interference when loading over-length material.

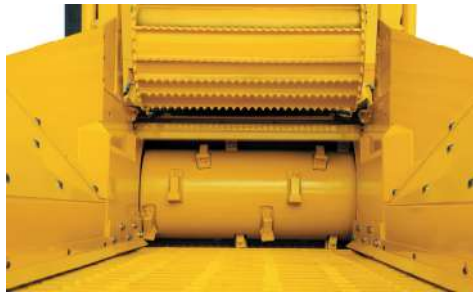

OPTIMAL CUTTING PERFORMANCE. The hardfaced duplex drum offers proven cutting performance, and reversible hammers and tips nearly double the wear life of single-sided designs and simplify daily maintenance. The optional chip drum produces a consistently chipped end product, rather than traditional shredded material, for uses such as biofuel.



MOBILITY. The track-driven grinder offers onsite mobility with a remote control. The HG4000Tx is designed with 16" (40.6 cm) of ground clearance, enhancing the unit's ability to traverse difficult terrain.



SIZING FLEXIBILITY. The top-loading design provides easy access to change screens, and a variety of screen sizes are available to meet your needs.



PROGRESSIVE PROCESSING. The patented SmartFeed system monitors engine rpm and adjusts grinding speed to increase productivity. The open-ended, wide infeed table makes material loading easy and efficient.



REMOTE CONTROL. A state-of-the-art wireless remote control unit allows the operator to run most machine functions from up to 300' (91.4 m) away.

HG400TX HORIZONTAL GRINDER

GENERAL DIMENSIONS

Max transport length: 37.2' (11.3 m)

Max transport width: 8.2' (2.5 m)

Max transport height: 11.6' (3.5 m)

Weight: 56,000 lb (25,401.2 kg)

ENGINE

Make and model: CAT C13

Gross horsepower: 440 hp (328 kW)

Fuel tank capacity: 225 gal (851.7 L)

INFEED CONVEYOR

Feed table width: 50" (127 cm)

Feed table length: 14' (4.3 m)

Loading height: 7.8' (2.4 m)

INFEED ROLLER

Max feed height: 25.8" (65.5 cm)

Infeed roller diameter: 28" (71.1 cm)

DUPLEX DRUM

Drum diameter: 22.5" (57.2 cm)

Tip diameter: 28.6" (72.6 cm)

Number of hammers: 8

Number of tips: 16

DISCHARGE SYSTEM

Belt length: 52.5' (16 m)

Belt width: 48" (121.9 cm)

Belt design: 3-ply - 300# with V-cleat

HYDRAULIC SYSTEM

Tank capacity: 100 gal (378.5 L)

Implement pump type: Pressure flow compensated

Discharge conveyor pump: Gear pump

CONTROLS

Display type: LCD monochromatic 128/64 pixel multifunction

Engine information: CAT SAE J1939 CAN parameters

Machine information: Operational, diagnostic, system parameters

REMOTE CONTROL

Display type: LCD monochromatic multiline

Engine information: CAT SAE J1939 CAN parameters

Machine information: Operational, diagnostic, system parameters

Operating range: Up to 300' (91.4 m)

TRACKS

Track frame: Rigid frame

Track type: Double grouser

Track brake type: Spring applied hydraulically released

High speed travel: 3 mph (4.9 km/h)

Track width option one - ground bearing pressure - soft ground (psi/kPa): 9.5 psi (65.5 kPa)

NOTES:

Vermeer Corporation reserves the right to make changes in engineering, design and specifications; add improvements; or discontinue manufacturing at any time without notice or obligation. Equipment shown is for illustrative purposes only and may display optional accessories or components. Please contact your local Vermeer dealer for more information on machine specifications. Vermeer, the Vermeer logo and Equipped to Do More are trademarks of Vermeer Manufacturing Company in the U.S. and/or other countries. CAT is a trademark of Caterpillar, Inc. © 2017 Vermeer Corporation. All Rights Reserved. Printed in the U.S.A. Please recycle.

